

KombiSIGN 40 / DesignLOOK

KS40 Design BWM 24VAC/DC GN/YE/RD



| | |
|------------------|---------------------|
| Part No.: | 639.301.01 |
| Series: | KombiSIGN 40 |

MECHANICAL DATA

| | |
|------------------------------|--------------------------------|
| Diameter | 40 mm |
| Materials | PC |
| Dome colour | Clear |
| Housing colour | Silver |
| Protection category | IP66 IP69K |
| Connection | Push-in terminal |
| cross-sectional area minimum | 0,25mm ² / 24AWG |
| cross-sectional area maximum | 1,50mm ² / 16AWG |
| Cable entry | Through hole |
| Cable entry maximum | d = 9 mm |
| Tension relief | Not present |
| Type of fixing | Base mounting Wall mounting |
| Working temperature minimum | -30°C |
| Working temperature maximum | +60°C |
| Weight with packaging | 210 g |
| Product weight | 129 g |

ELECTRICAL DATA

| | |
|-----------------------------|--------------------|
| Operating voltage | 24V |
| Operating voltage type | AC/DC |
| Operating voltage frequency | 50Hz |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 24 VDC |
| Rated operational current | 40 mA |
| Rated inrush current | 500 mA |
| Protection class | Protection class 3 |
| Pollution degree | 3 |
| Request to external PSU | SELV/PELV |

OPTICAL DATA

| | |
|----------------------|------------------------|
| Light source | LED |
| Light colour | Green Red Yellow |
| Optical signal image | Blink Permanent |
| Blink frequency | 1 Hz |
| Service life optical | 50,000 h maximum |



For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 40 / DesignLOOK

KS40 Design BWM 24VAC/DC GN/YE/RD

| APPROVAL DATA | |
|------------------------------|--------------------------------|
| Conforms with CE | Yes (through the components) |
| Conforms with RoHS directive | Fulfills substance restriction |
| WEEE | Yes |
| Conforms with ATEX-directive | No |
| Conforms with CCC | No |
| Conforms with UL | No |
| Conforms with FCC | No |
| Conforms with IC | No |
| EAC certificate available | Yes |
| Conforms with AS-I | No |
| ICAO Certification | No |
| Conforms with DNV | No |
| Conforms with RoHS CN | No |
| Conforms with VdS | No |




For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 40 / DesignLOOK

KS40 Design BWM 24VAC/DC GN/YE/RD

DRAWING

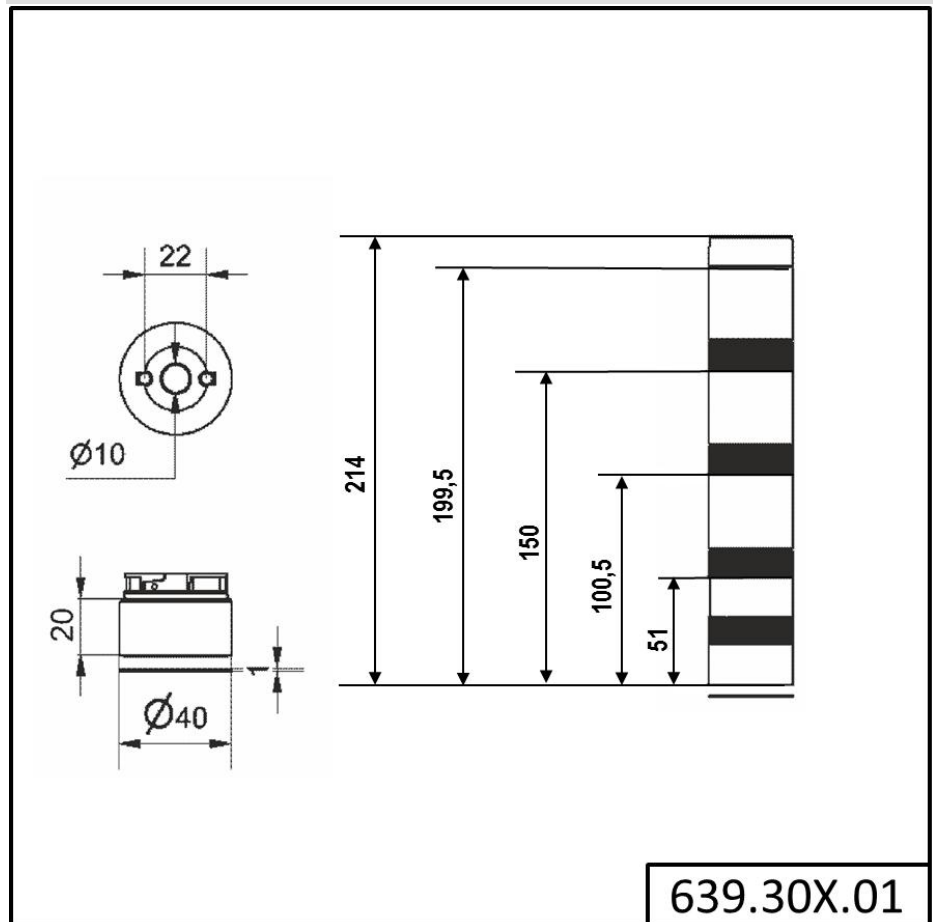

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.