

Midi Horns and Sirens / Signal Horn 570

**Signal horn WM Contin. tone 115VAC GY**

**Part No.:** 570.052.67

**MECHANICAL DATA**

|                              |                             |
|------------------------------|-----------------------------|
| Length                       | 152 mm                      |
| Height                       | 360 mm                      |
| Diameter                     | 148 mm                      |
| Materials                    | PC/ABS                      |
| Housing colour               | Grey                        |
| Protection category          | IP55                        |
| Connection                   | Screw terminals             |
| cross-sectional area maximum | 2,50mm <sup>2</sup> / 14AWG |
| Cable entry                  | Through hole                |
| Cable entry maximum          | d = 10 mm                   |
| Type of fixing               | Wall mounting               |
| Working temperature minimum  | -20°C                       |
| Working temperature maximum  | +60°C                       |
| Weight with packaging        | 1067 g                      |
| Product weight               | 942 g                       |

**ELECTRICAL DATA**

|                             |                          |
|-----------------------------|--------------------------|
| Operating voltage           | 115V                     |
| Operating voltage type      | AC                       |
| Operating voltage frequency | 60Hz                     |
| Operating voltage tolerance | +/- 10%                  |
| Rated operational voltage   | 115 VAC                  |
| Rated operational current   | 200 mA                   |
| Rated inrush current        | <500mA                   |
| Protection class            | Protection class 2       |
| Pollution degree            | 3                        |
| Overvoltage category        | II                       |
| Isolation voltage           | Ui = 250V; Uimp = 2.500V |

**ACOUSTIC DATA**

|                             |                 |
|-----------------------------|-----------------|
| Volume (max) at 1m distance | 108,0 dB (A)    |
| Acoustic signal image       | Continuous tone |
| Acoustic service life       | 250 h minimum   |

**APPROVAL DATA**

|                              |     |
|------------------------------|-----|
| Conforms with CE             | Yes |
| Conforms with RoHS directive | Yes |
| WEEE                         | Yes |
| Conforms with ATEX-directive | No  |

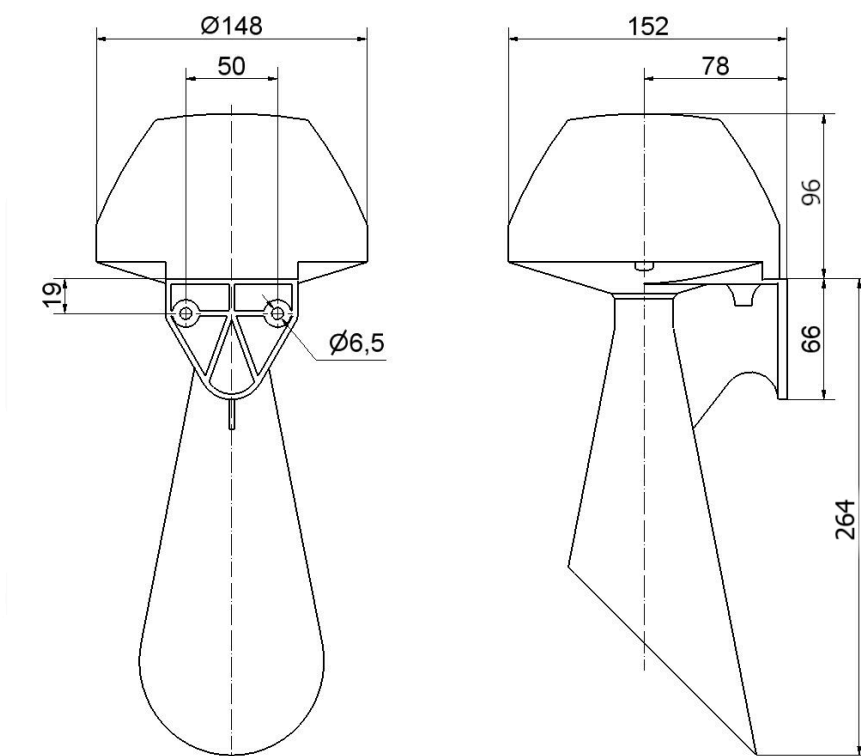

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Midi Horns and Sirens / Signal Horn 570

## Signal horn WM Contin. tone 115VAC GY

|                               |                       |
|-------------------------------|-----------------------|
| Conforms with CCC             | No                    |
| Conforms with UL              | No                    |
| Conforms with FCC             | No                    |
| Conforms with IC              | No                    |
| EAC certificate available     | Yes                   |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with AS-I            | No                    |
| ICAO Certification            | No                    |
| Conforms with DNV             | No                    |
| Conforms with RoHS CN         | No                    |
| Conforms with VdS             | No                    |

### DRAWING



**!** For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.